
SURPER CONSOLE X PRO

User Manual

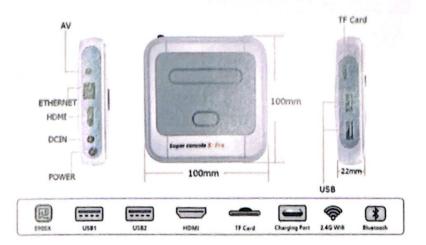

Model:Super Console X PRO Dual System: Game Console & TV Box

DC Power:5V 2A Bluetooth:BT 4.0

WiFi:2.4G/5G Language:Multi-languages

1. Product Information

Product size: 10cm*10cm*2.2cm

Product weight: 106g Support HDMI/AV

Support WiFi/LAN

Support Download games

Support Multi-language

Dual System: Game Console & TV Box

2. Product Features

- Mini size, retro design, palm size, can be put in the pocket, it's the best choice for family, travel, party, corporate entertainment.
- Equipped with upgraded S905X chip, more powerful than RK3326. 64-bit 4-core CPU, 5-core Mail-450 graphics processor, and supports 4K@60fps video hard decoding and HDR processing. The SDK supports Android, Linux, and WebOS, and is compatible with both 32-bit and 64-bit applications. S905X supports Google VP9 4K decoding, and supports larger coding blocks and more color spaces. It can be applied to the global smart IPTV and OTT markets.
- Equipped with 64GB/128GB/256GB memory card, built-in 30000/41000/50000 unique games.
- Support more than 50 emulators, such as PSP DC PS1 N64 NEOGEO, etc.
- It can be expanded to 256GB and can hold up to 80,000 games. Support to connect to the network via LAN interface or wifi.
- Support HDMI and AV input, HDMI supports 1080P / 720P high-definition output, can be connected to display screens, projectors, TVs and other equipment, the big screen is clearer.
- Game Console and TV dual system, support to connect to WIFI, Youtube online TV, movies, online access to information, support Google play to add applications
- The heat dissipation hole design on the back of the machine makes the heat dissipation more even.
- Equipped with two wireless controllers, support up to 5 players, you can play with friends and family at any time.
- Open Linux source system, suitable for DIY. For the specific method of downloading the game, please refer to the instructions or consult our customer service

3. PACKING LIST

- 1* SURPER CONSOLE X PRO
- 1*TF Card
- 2* Controller (optional)
- 1*TV Remote Control
- 1*Power Adapter
- 1*HDMI HD Cable
- 1*USB Expansion
- 1*User Manual

4. Highlights of Latest Upgrades:

- (1) Compatibility issues of some applications have been resolved;
- (2) The heating problem of the console has been properly solved, and there will be no serious overheating problem;
- (3) Optimized and improved the application download in the Google play store, now you can easily download the application.

5. Precautions

Do not store the machine in a dusty, humid, high temperature and strong magnetic environment.

It is forbidden to use in high temperature and high humidity environment (this product is not waterproof).

When you carry this machine out, participate in high-intensity sports such as running, climbing, etc., please fix the machine firmly on your body or backpack to avoid damage caused by falling from a height or squeezing heavy objects.

Pay attention to shutting down the SD card when it is inserted or unplugged, because the current is very large when plugging or unplugging, which will cause unpredictable damage to the machine.

When the power adapter is fully charged, please do not touch the power video unit with wet hands to prevent electric shock.

Some games of this product contain violent scenes, please be careful with children before using them. Parents are also requested to do a good job of supervising their children and not to include for a long time.

Do not disassemble the machine without authorization.













6. System Startup and Shutdown

- (1) System Startup: Press the power button to start the system.
- (2) Shut Down: Press SELECT--->>SHUTDOWN SYSTEM (software shutdown pretextion) system), and then cut off the power.

After entering the main interface of the system, operate the keys with reference of the following table: Left/right cross keys and joystick B key (right side function key) A key (lower function key) START Key Set up SELECT Key Soft restart or soft shutdown setting L2/R2 Game menu page flip

7. Main Interface of the System









(2) Handle Button Setting

After the USB interface is connected to the handle, press the handle B (OK) button to enter the handle button setting.



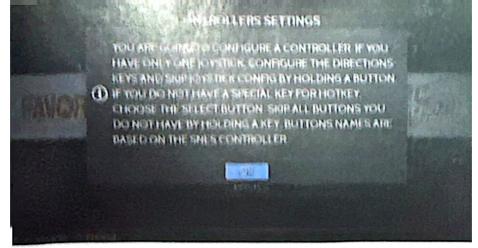



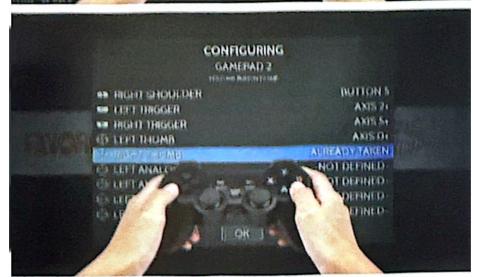




(3) WIFI Connection

START---->>NETWORK SETTINGS---->>ENABLE WIFI, then select the wifi network as required and fill in the password;






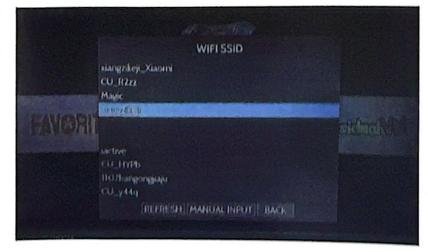

		11 119		
		NETWORK SETTING	is	
FAVORIT	INFORMATIONS			
	STATUS IP ADDRESS SETTINGS		NOT CONNECTED NOT CONNECTED	
	ENABLE WIFI WIFI SSID		viangzikeji >	stdnet V.
	外国教女			
		BACK		
	THE RESERVE			
STATES OF MARK OF STATES	PER PRINCIPLE	The second secon		



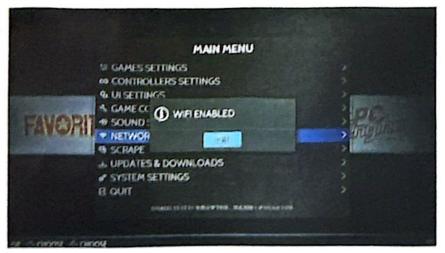

(4) Game Console/TV Dual System

TV system

When the card is not inserted, it is Android system, it supports watching TV, supports KODI TV system turn into game system:

Please insert the game card at first, follow the steps below to use the remote control

My Application>>LiberELEC>>OK>>Allow

Note: When its TV system turn into game system, it requires 2.4G HZ flying mouse remote control to operate.

9. Adding Game Methods

There are many ways to copy games:

The First Type: (compatible with multiple win systems)

Insert the game console memory card into the computer and use DiskGenius software:

- (1) Open DiskGenius, make sure DiskGenius has recognized the memory card;
- (2) Find the rom folder and put the game in the corresponding folder;
- (3) Drag the game that needs to be placed directly into the corresponding folder;
- (4) Safe pop-up after transmission.

The Second Type:

The second way, if you use the memory card equipped with the game console, you can directly insert it into the win10 computer,

find the data mobile hard disk, and directly copy the game to the corresponding emulator in the roms folder.

The Third Type: (network connection)

(1) Please connect the device to the network first.


In the example below, the IP address is: 192.168.3.170. In the computer resource manager, enter \\192.168.3.170 and press Enter.



If prompted to enter a user name and password, the default user name: root, password: emuelec.

(2) Open the Storage/Roms Folder:

You can see many sub folders, each of which corresponds to a simulator game, and the corresponding game needs to be placed in the corresponding folder to be correctly identified

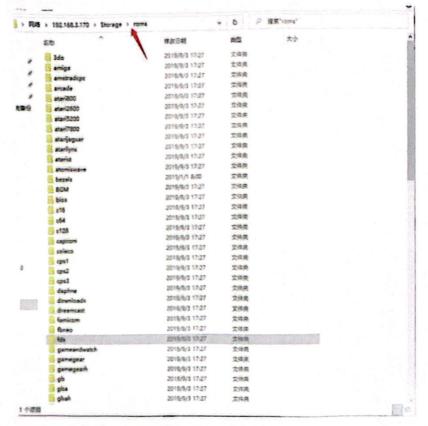

(3) Example of the folder list corresponding to the simulator:


Arcade-FBA format	roms\arcade\fba
Arcade-MAME format	roms\arcade\mame2003
SNES	roms\nes
PSP	roms\psp
PS1	roms\psx
NES/FC	roms\nes
phys	

Note: The system distinguishes games by folder name, do not modify any directory structure, just copy the game files to the folder of the corresponding simulator.

10. Change Game Emulators:

There may be multiple simulator files. If individual games cannot be opened or you want to try the effects of other simulators, please use the following methods to change the simulator:


Choose to change the rom file of the simulator; Press SELECT to enter the game settings options (options) --->>game options--->>advanced system options, this option can set the default emulator of all roms in the folder;

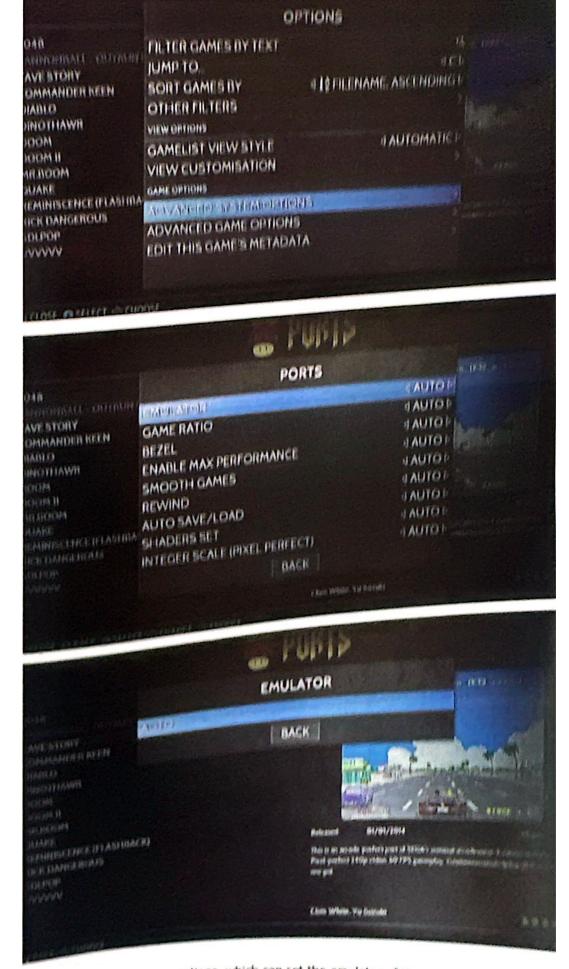

select advanced game options, which can set the emulator of the selected game;

	The second second		
	OPTIONS		
048 WOODBACK OURSING	FILTER GAMES BY TEXT	- a ru	
AVE STORY OMMANDER KEEN PLABLO	JUMP TO SORT GAMES BY	4 L2 FILENAME, ASCENDING >	
	OTHER FILTERS	1127	
	VIEW OPTIONS	ANTONICE	
	GAMELIST VIEW STYLE VIEW CUSTOMISATION	4 AUTOMATIC >	
	GAME OPTIONS		
	ADVANCED SYSTEM OPTION ADVANCED GAME OPTIONS	NO. INC. THE PARTY NAMED IN	
	EDIT THIS GAME'S METACA		
The second of the second	《四月》		



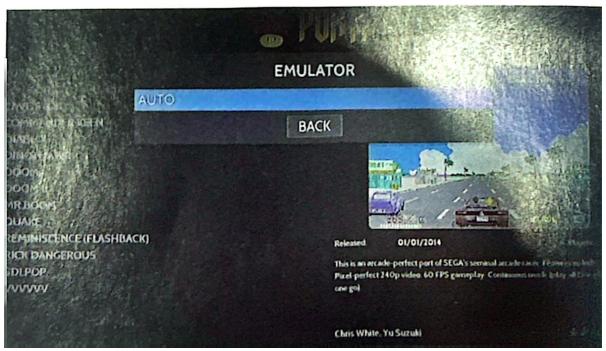

Scanned with CamScanner

(1) Is the output screen of this game machine clear?

SUPER CONSOLE X PRO supports HDMI and AV input, HDMI supports 1080P / 720P highdefinition output, can be connected to display screens, projectors, TVs and other equipment, the big screen is clearer.

(2) Is this game console smooth to play games?

SUPER CONSOLE X PRO is equipped with an upgraded S905X chip, with a 4-core ARM Cortex-A53 CPU, a 5-core Mali-450 graphics processor, perfect support for PSP/PS1/N64/NDS/MAME and other emulators, making the game smoother.

(3) Can I add games by myself?

SUPER CONSOLE X PRO uses an open source Linux system and supports adding games by itself, up to 80,000+ games can be added.

Tutorial Videos:

For more usage methods, please refer to:

URL 1:

https://www.youtube.com/channel/UC9pHw2msnsd8i1QZVY180eQ?view_as=subscriber



URL 2: https://m.youtube.com/channel/UC838aE hYrS5FSvdYhkcORA

